

Anker SOLIX Solarbank Multisystem

All-Around Solution to Zero Energy Bills Anxiety



Telephone: (DE) +49 (800) 000 2522

E-Mail: support@anker.com


Note: Product specifications and details are subject to change without notice. Refer to the Anker SOLIX official website for current and accurate information.



LinkedIn



Website

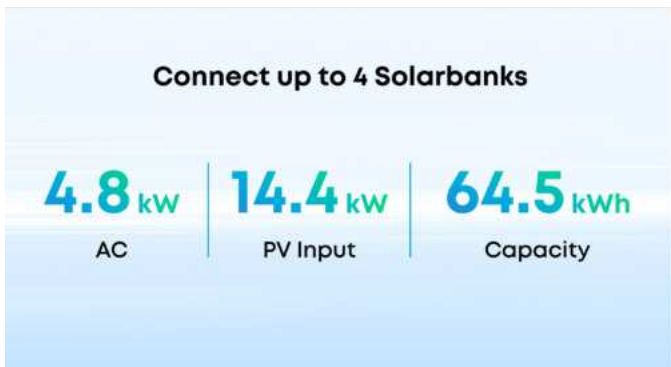

| Anker SOLIX Power Dock

Schuko Terminal (AC Output and Input)	
Normal Voltage	L + N + PE 230VAC, 50Hz/60Hz
Max AC Output Current	16AAC
Max AC Output Power	3.6kW
EV 7.4kW (Single-Phase)	
Normal Voltage	L + N + PE 230VAC, 50Hz/60Hz
Max AC Output Current	32AAC
Rated AC Output Power	7.4kW
EV 11kW/22kW (Three-Phase)	
Normal Voltage	L1 + L2 + L3 + N + PE 400VAC, 50Hz/60Hz
Max AC Output Current	32AAC
Rated AC Output Power	22kW
Warranty	10 Years
Lifecycle	15 Years
IP Rating	IP54
Net Weight	11 kg
Dimensions	429 × 174.5 × 345 mm

| Unboxing

